

ANTIGRAFFITI PROTECTION PRODUCT FOR FAÇADES

DESCRIPTION



Milky liquid that once applied on a substrate, protects it against painting of graffiti aiding in their later elimination.

USES

Protection of façades, walls against graffiti on mineral substrates such as natural stone, granite, marble, cementitious mortars, concrete, brick, etc..

ADVANTAGES

- Excellent protection for mineral substrate against graffiti.
- Easy elimination of paintings on it.

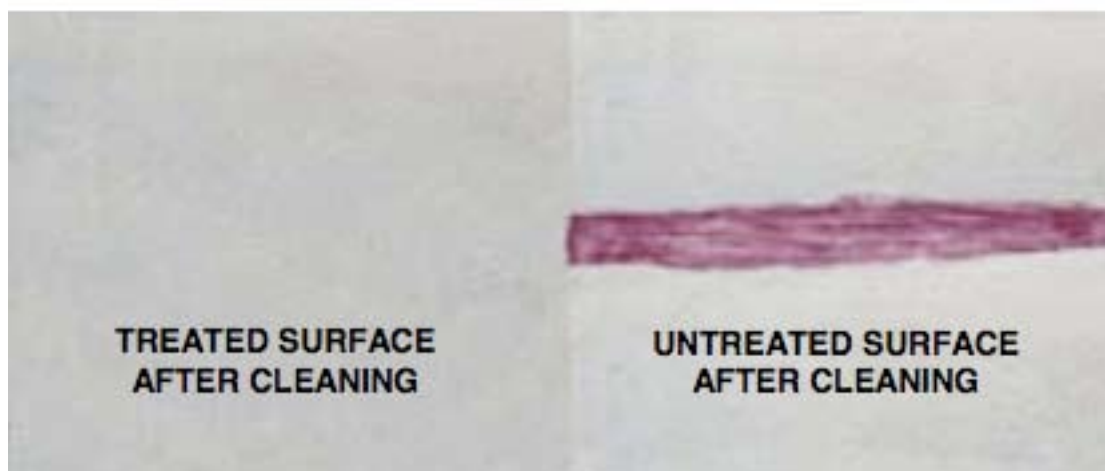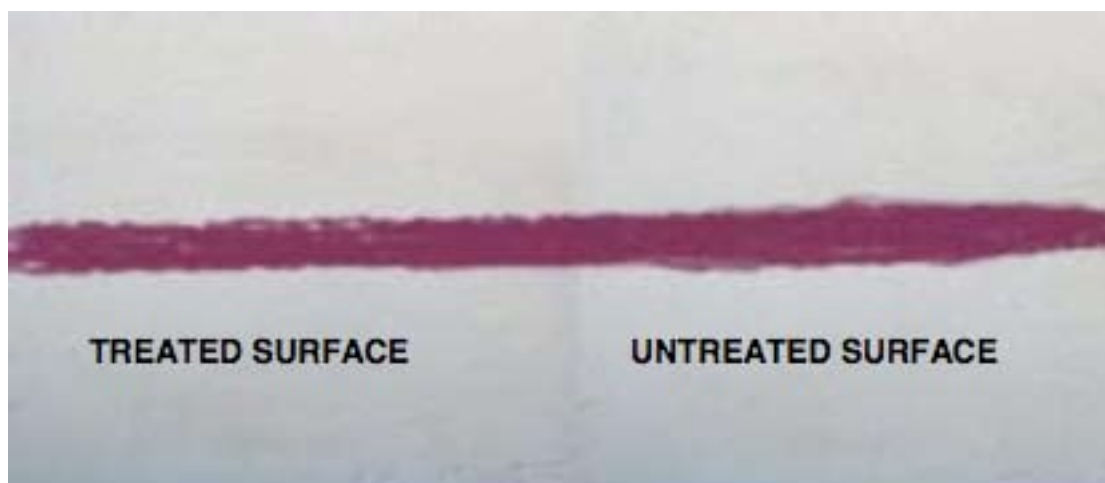

MAXCLEAR GRAFFITI



APPLICATION METHOD

MAXCLEAR GRAFFITI can be applied on mineral substrates such as natural stone, granite, marble, cement mortars, concrete, brick, etc. It must never be applied on synthetic substrates such as paints, primers, etc. MAXCLEAR GRAFFITI CLEANER could attack synthetic substrates.

It is advisable that the substrate to be protected has certain porosity for perfect coverage because the product could run on the surface if it is too smooth.

MAXCLEAR GRAFFITI is supplied ready to apply either by brush, roller or spray gun. Prior to the application, it is advisable to do a trial with the product, as in certain cases it can produce changes in hue on the substrate after application. Also, to ensure perfect bonding and prevent white stains on the façade, the substrate should be dampened prior to application.

As soon as the superficial water disappears a first coat of the product should be applied and allowed to dry for 30 to 60 minutes, before applying the second coat, striving to obtain a uniform coverage. The recommended drying time for optimum protection of the substrate is from 12 to 24 hours.

To eliminate graffiti from a substrate already protected with MAXCLEAR GRAFFITI, MAXCLEAR GRAFFITI CLEANER shall be applied on the painted surface and after allowing it to act for a few minutes, all of the material should be eliminated with high pressure water spray. Indications on the Technical Bulletin N° 95 for MAXCLEAR GRAFFITI CLEANER should be followed. Once the surface is clean, it should be protected again with MAXCLEAR GRAFFITI.

COVERAGE

Approximately 3 m² per litre, but may vary greatly depending on the porosity of the substrate.

PACKAGING

20 and 5 litre jerrycans.

STORAGE

9 months in its original unopened container, in a dry covered place, protected from frost.

SAFETY

Avoid contact with the skin and eyes, using appropriate clothing, rubber gloves and protective goggles and masks. If it came in contact with the skin, clean with warm water and soap. In case of contact with the eyes, rinse thoroughly with abundant water and get medical assistance.



Technical information

IBC Limited, Unit 143, Grange Drive, Baldoyle Industrial Estate, Baldoyle, Dublin 13
Tel: +353 1 8321005 Fax: +353 1 8393539 Email: info@ibcltd.net www.ibcltd.net

MAXCLEAR GRAFFITI



TECHNICAL DATA.

Density (gr/cm³)	1.015
Solids content (%)	18

Disclaimer:

The general information provided in the present technical description, application guidelines and other recommendations, is based on research and experience. However the client is obliged to determine himself what products are suitable for use. Accordingly, no liability will be accepted by IBC.

For further information contact the IBC Technical Department.



Technical information

IBC Limited, Unit 143, Grange Drive, Baldoye Industrial Estate, Baldoye, Dublin 13
Tel: +353 1 8321005 Fax: +353 1 8393539 Email: info@ibcltd.net www.ibcltd.net